
Matching domain experts by training from scratch on domain knowledge

Xiaoliang Luo¹ Guangzhi Sun² Bradley C. Love^{1,3}

Abstract

Recently, large language models (LLMs) have outperformed human experts in predicting the results of neuroscience experiments (Luo et al., 2024). What is the basis for this performance? One possibility is that statistical patterns in that specific scientific literature, as opposed to emergent reasoning abilities arising from broader training, underlie LLMs’ performance. To evaluate this possibility, we trained (next word prediction) a relatively small 124M-parameter GPT-2 model on 1.3 billion tokens of domain-specific knowledge. Despite being orders of magnitude smaller than larger LLMs trained on trillions of tokens, small models achieved expert-level performance in predicting neuroscience results. Small models trained on the neuroscience literature succeeded when they were trained from scratch using a tokenizer specifically trained on neuroscience text or when the neuroscience literature was used to finetune a pretrained GPT-2. Our results indicate that expert-level performance may be attained by even small LLMs through domain-specific, auto-regressive training approaches.

1. Introduction

Large language models (LLMs) are statistical machines typically designed to predict the next token—whether it’s a word, pixel, or protein sequence. Leveraging vast amounts of training data, LLMs have demonstrated impressive capabilities, including passing professional exams, reasoning (though with limitations), translation, solving mathematics problems, and writing computer code (Strack, 2023; Srivastava et al., 2022; Gunasekar et al., 2023).

Traditionally, the human-level performance of large language models (LLMs) has been evaluated using benchmarks that focus on their *backward-looking* capabilities, such as

¹Department of Experimental Psychology, University College London, UK ²Department of Engineering, University of Cambridge, UK ³The Alan Turing Institute, UK. Correspondence to: Xiaoliang Luo <xiao.luo.17@ucl.ac.uk>.

core knowledge retrieval and reasoning within a given context. Notable benchmarks include MMLU (Hendrycks et al., 2021), PubMedQA (Jin et al., 2019), and MedMCQA (Pal et al., 2022). However, recent research by Luo et al. (2024) has highlighted LLMs’ exceptional forward-looking capabilities, particularly in predicting novel outcomes of neuroscience studies. With the development of BrainBench, a *forward-looking* neuroscience benchmark, Luo et al. (2024) have shown that LLMs can outperform neuroscientists in predicting the results of neuroscientific experiments when provided with the experiment’s background and methodologies. These findings raise important questions about the nature of scientific progress, suggesting that many discoveries might largely be iterations of noisy signals from decades of scientific literature. Additionally, they prompt a reevaluation of the extent to which accurate predictions of the future rely more on pattern recognition by auto-regressive models than on traditional scientific reasoning.

In this contribution, we explore the effects of training on domain-specific data by employing a significantly smaller language model, GPT-2 with 124 million parameters (Radford et al., 2019), on a neuroscience-focused dataset containing 1.3 billion tokens. This approach helps assess the effectiveness of auto-regressive training on specialized data in approximating human-level performance. Despite the model size being only about 0.056% to 1%¹ of those evaluated by Luo et al. (2024) and the training data being about 0.065%² of those used in Luo et al. (2024), we show both finetuning a pretrained 124M-parameter GPT-2 and training it from scratch with a custom tokenizer for neuroscience yield models that achieve 63.5% and 63% accuracy on BrainBench, matching the performance of human experts (63.4%).

2. Method

2.1. BrainBench

BrainBench has curated 200 test cases from abstracts in the *Journal of Neuroscience published in 2023*. These abstracts are categorized into five sections: Behavioral/Cognitive, Systems/Circuits, Neurobiology of Disease, Develop-

¹Estimated using 7B and 180B LLMs.

²Estimated based on reported Llama-2 training data size (2 trillion tokens).

ment/Plasticity/Repair, and Cellular/Molecular.

Each test case includes a published abstract alongside a modified version crafted by neuroscientists. These modifications, though minimal, significantly alter the results—for instance, by changing the roles of brain regions or reversing a result’s direction (e.g., from "decreases" to "increases"). Despite these changes, the altered abstracts remain logically coherent.

The test-taker’s challenge is to identify the correct study outcome by choosing between the original abstract and its altered counterpart.

2.2. Model evaluation

We presented models with two versions of the abstracts from each test case separately. We prefixed each abstract with the prompt “*You are a neuroscientist with deep knowledge in neuroscience. Here is an abstract from a neuroscience publication:*”. We then measured the perplexity of both passages and used perplexity as the indicator of whether models favor one abstract or the other.

Perplexity measures the degree of uncertainty of a model when generating a particular sequence of text and is defined as the exponentiated average negative log-likelihood of a tokenized sequence. If we have a tokenized abstract $X = (x_0, x_1, \dots, x_t)$, then the perplexity of X , given a model parameterized by θ is,

$$PPL(X) = \exp \left\{ -\frac{1}{t} \sum_i^t \log p_\theta(x_i | x_{<i}) \right\} \quad (1)$$

where $\log p_\theta(x_i | x_{<i})$ is the log-likelihood of the i th token conditioned on the preceding tokens $x_{<i}$ according to the model. Given both the original and the altered abstracts, we used the abstract with lower perplexity as the model’s decision and evaluated the overall accuracy across the entire BrainBench dataset accordingly.

2.3. Human evaluation

Previous work (Luo et al., 2024) collected human judgments from 171 neuroscience experts on BrainBench. These data are publicly available³ and provide a useful comparison to LLM performance.

2.4. Model configurations

We considered a number of variants of GPT-2 differ by their training strategies including training data and tokenization. Model variants are summarized in Table 1.

The pretrained GPT-2 and the tokenizer were loaded from

³<https://github.com/brainpnt-lovelab/BrainBench>

Table 1. Model variants.

Variant	Training	Data	Tokenizer
Untrained	-	-	pretrained
Pretrained	from scratch	WebText	pretrained
Scratch	from scratch	neuroscience	pretrained
Finetuned (from pretrained)	finetune	neuroscience	pretrained
Scratch (Neuro tokenizer)	from scratch	neuroscience	custom

Huggingface hub⁴, which were trained on the WebText dataset collected by OpenAI (Radford et al., 2019). The neuroscience training data was collected by Luo et al. (2024) (see Sec. 2.5). The models trained from scratch and finetuned used the neuroscience data only. The customized tokenizer was trained entirely on the same neuroscience data using the Byte-Pair Encoding tokenization algorithm, which was also used in the pretrained GPT-2 (Radford et al., 2019).

2.5. Neuroscience training data

The data we used to train GPT-2 from scratch, finetune the pretrained GPT-2 as well as train the neuro-tokenizer were collected by Luo et al. (2024). The training data spans Neuroscience publication (abstracts and full articles) dates 2002-2022, totaling 1.3 billion tokens. We randomly allocated 90% of the data for training, reserving the remaining 10% for validation. Training details see Appendix.

3. Results

We explored various training strategies and found that finetuning the pretrained GPT-2 on 20 years of neuroscience literature allowed it to achieve human-level performance on BrainBench, recording a 63.5% accuracy (Fig. 1; human experts: 63.4%). Training GPT-2 from scratch solely with neuroscience literature was less effective. However, developing a new tokenizer tailored to neuroscience literature and using it to retrain GPT-2 from scratch with the same data resulted in a performance on par with human experts, achieving 63% accuracy (Fig. 1). Notably, the amount of domain-specific data used to train GPT-2 from scratch is only about one-seventh of the text used to pretrain the original model. This indicates two effective approaches to reach human-level performance: pretraining on a broad general corpus followed by finetuning on domain-specific data, or using a specialized tokenizer and significantly less domain-specific data.

To assess the impact of a specialized tokenizer, we compared the tokens generated by the pretrained GPT-2 tokenizer with those from our neuro-tokenizer, trained on neuroscience data. The two tokenizers shared 47.9% of their vocabularies (Fig 2A). We utilized GPT-4 (zero-shot prompting) to ana-

⁴<https://huggingface.co/openai-community/gpt2>

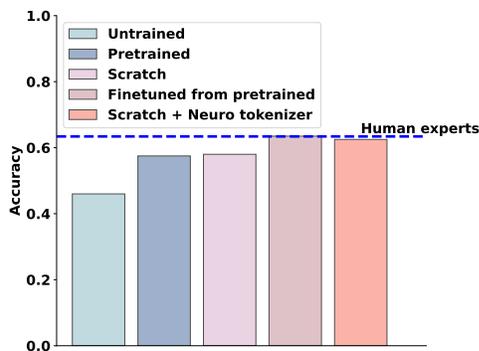


Figure 1. Performance of human experts and models on BrainBench. Two configurations of GPT-2 models achieve human-level performance on BrainBench: one by fine-tuning the pretrained GPT-2 on neuroscience literature, and the other by using a new tokenizer (neuro-tokenizer) trained on neuroscience literature and retraining GPT-2 from scratch with only neuroscience data. Versions of GPT-2 that are untrained, pretrained, or trained solely on neuroscience data without these modifications underperform compared to experts on BrainBench.

lyze each vocabulary and identify tokens frequently associated with neuroscience. Our findings showed that the neuro-tokenizer contained twice the proportion of neuroscience-related tokens compared to the pretrained tokenizer (Fig. 2B-C). This significant improvement in specialized tokenization suggests that it is possible to pretrain GPT-2 from scratch with significantly less neuroscience data using the neuro-tokenizer, yet achieve performance comparable to both the finetuned model and human experts.

To better understand the differences in tokenization by the two tokenizers, we analyzed examples from BrainBench test cases where the pretrained GPT-2 answered incorrectly, whereas the GPT-2 trained with the neuro-tokenizer responded correctly. Figure 3 illustrates how the neuro-tokenizer more effectively preserves domain-specific terminologies, such as brain regions or neurotransmitters. We believe that this specialized tokenization allows the model to utilize limited domain knowledge more effectively and to consider a broader context within the fixed context window of the training data.

4. Discussion

In this contribution, we demonstrated that training a relatively small LLM (GPT-2) on limited domain-specific data can match the predictive performance of human experts on BrainBench. By finetuning GPT-2 with just a fraction of its pretraining data, we elevated its performance to the level of trained neuroscientists. Additionally, we showed that training GPT-2 from scratch, with domain-specific knowledge incorporated into the tokenizer, yields compa-

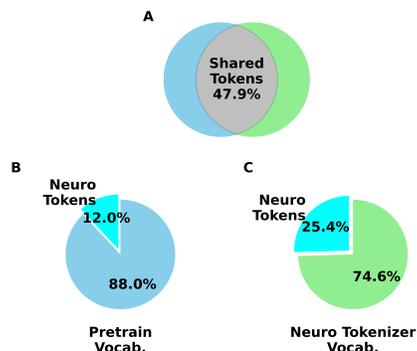


Figure 2. Token Analysis. (A) The pretrained GPT-2 tokenizer and the neuro-tokenizer share 47.9% of their vocabularies. (B-C) Of the vocabularies from the two tokenizers, 12.0% of the tokens from the pretrained tokenizer are commonly associated with neuroscience according to GPT-4, compared to 25.4% of the tokens from the neuro-tokenizer.

table results. This highlights the importance of preserving domain-specific terminologies during tokenization to improve language models’ performance on specialized tasks, as suggested by Yang et al. (2024) in the clinical science domain. Pretraining on small-scale knowledge with specialized tokenization offers a more efficient method for achieving human-like performance on domain-specific tasks.

Achieving parity with human experts using our simplified setup prompts questions about the essence of scientific progress. It suggests that a statistical machine, even one as basic as predicting the next word, can discern the intricate structure of a knowledge-rich field. However, it is crucial to acknowledge the substantial performance gap between GPT-2 and more advanced LLMs on BrainBench tests, at approximately 15%. While factors like model size and data volume likely play a role, attributing the gap solely to scale oversimplifies the issue. Future research should aim to pinpoint the specific elements needed to narrow this disparity.

Working with smaller models does have benefits, such as enabling teams with modest resources to have full control over the training procedure. This control can minimize the risk of leakage and allow for additional hypotheses to be evaluated. For instance, in future work, we will evaluate whether training on adjacency fields like psychology impacts performance on BrainBench, a neuroscience benchmark. That degree of control is not possible using pretrained LLMs and will allow us to evaluate the structure of scientific disciplines.

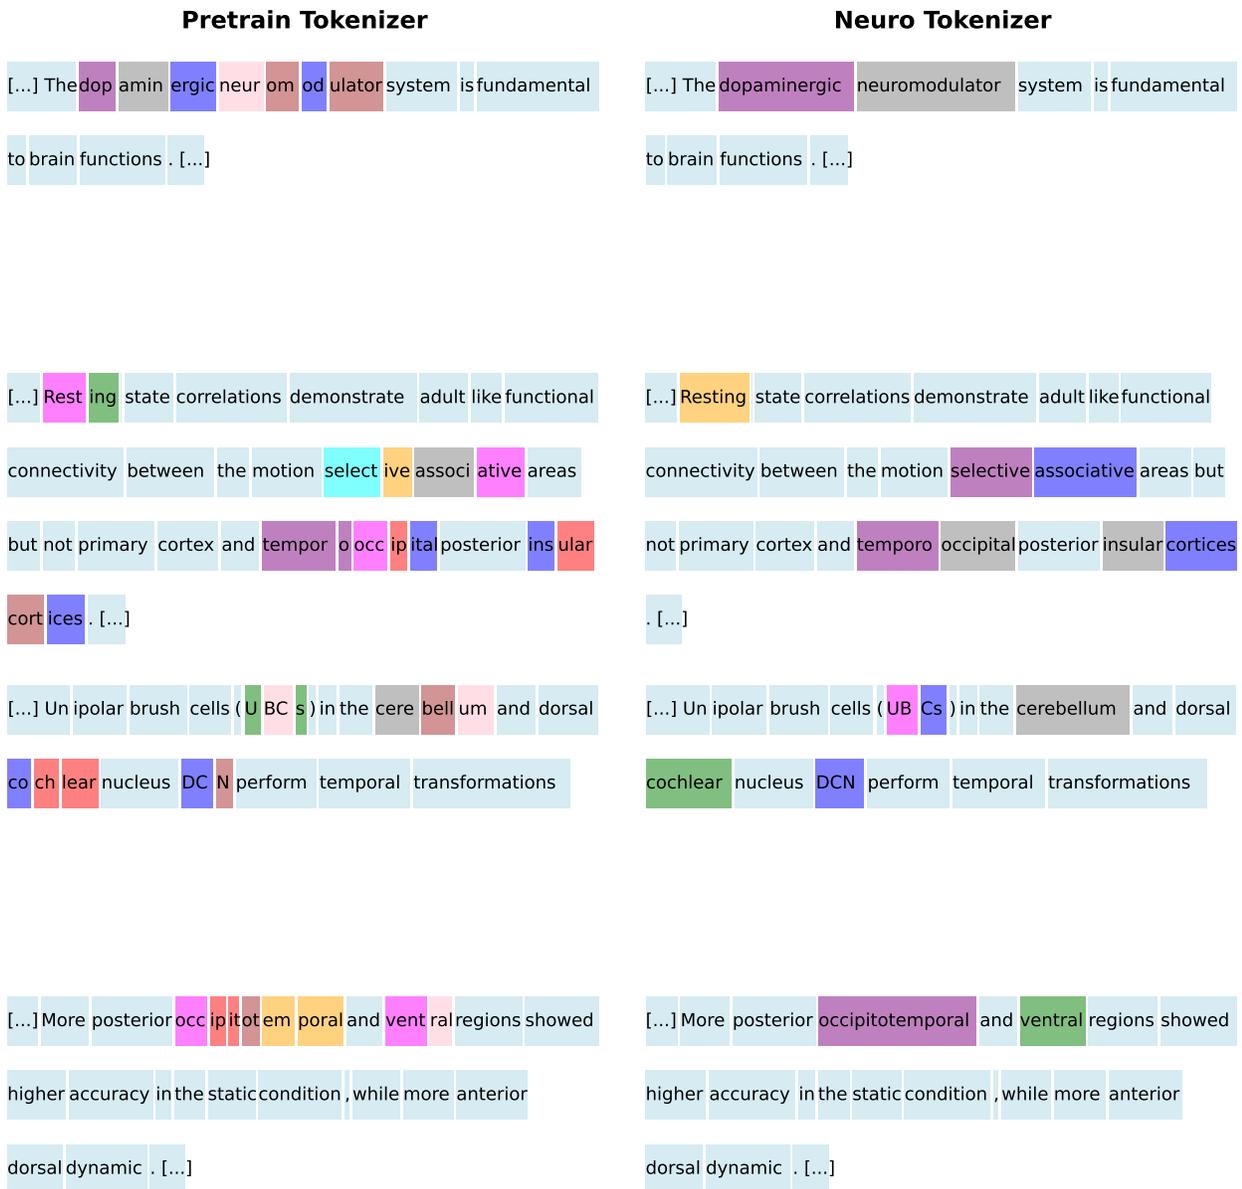


Figure 3. **Tokenization examples.** Compared to a pretrained tokenizer trained on general text, a neuro-tokenizer trained specifically on neuroscience literature better preserves domain-specific terminology, such as brain regions, in neuroscience.

References

- Gunasekar, S., Zhang, Y., Aneja, J., Mendes, C. C. T., Del Giorno, A., Gopi, S., Javaheripi, M., Kauffmann, P., de Rosa, G., Saarikivi, O., Salim, A., Shah, S., Behl, H. S., Wang, X., Bubeck, S., Eldan, R., Kalai, A. T., Lee, Y. T., and Li, Y. Textbooks Are All You Need. 2023. doi: 10.48550/ARXIV.2306.11644. URL <https://arxiv.org/abs/2306.11644>. Publisher: arXiv Version Number: 1.
- Hendrycks, D., Burns, C., Basart, S., Zou, A., Mazeika, M., Song, D., and Steinhardt, J. Measuring Massive Multitask Language Understanding, January 2021. URL <http://arxiv.org/abs/2009.03300>. arXiv:2009.03300 [cs].
- Jin, Q., Dhingra, B., Liu, Z., Cohen, W. W., and Lu, X. PubMedQA: A Dataset for Biomedical Research Question Answering, September 2019. URL <http://arxiv.org/abs/1909.06146>. arXiv:1909.06146 [cs, q-bio].
- Loshchilov, I. and Hutter, F. Decoupled Weight Decay Regularization, January 2019. URL <http://arxiv.org/abs/1711.05101>. arXiv:1711.05101 [cs, math].
- Luo, X., Recharadt, A., Sun, G., Nejad, K. K., Yáñez, F., Yilmaz, B., Lee, K., Cohen, A. O., Borghesani, V., Pashkov, A., Marinazzo, D., Nicholas, J., Salatiello, A., Sucholutsky, I., Minervini, P., Razavi, S., Rocca, R., Yusifov, E., Okalova, T., Gu, N., Ferianc, M., Khona, M., Patil, K. R., Lee, P.-S., Mata, R., Myers, N. E., Bizley, J. K., Musslick, S., Bilgin, I. P., Niso, G., Ales, J. M., Gaebler, M., Murty, N. A. R., Loued-Khenissi, L., Behler, A., Hall, C. M., Dafflon, J., Bao, S. D., and Love, B. C. Large language models surpass human experts in predicting neuroscience results, March 2024. URL <http://arxiv.org/abs/2403.03230>. arXiv:2403.03230 [cs, q-bio].
- Pal, A., Umapathi, L. K., and Sankarasubbu, M. MedM-CQA : A Large-scale Multi-Subject Multi-Choice Dataset for Medical domain Question Answering, March 2022. URL <http://arxiv.org/abs/2203.14371>. arXiv:2203.14371 [cs].
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., and Sutskever, I. Language Models are Unsupervised Multitask Learners. 2019.
- Srivastava, A., Rastogi, A., Rao, A., Shoeb, A. A. M., Abid, A., Fisch, A., Brown, A. R., Santoro, A., Gupta, A., Garriga-Alonso, A., Kluska, A., Lewkowycz, A., Agarwal, A., Power, A., Ray, A., Warstadt, A., Kocurek, A. W., Safaya, A., Tazarv, A., Xiang, A., Parrish, A., Nie, A., Hussain, A., Askell, A., Dsouza, A., Slone, A., Rahane, A., Iyer, A. S., Andreassen, A., Madotto, A., Santilli, A., Stuhlmüller, A., Dai, A., La, A., Lampinen, A., Zou, A., Jiang, A., Chen, A., Vuong, A., Gupta, A., Gottardi, A., Norelli, A., Venkatesh, A., Gholamidavoodi, A., Tabassum, A., Menezes, A., Kirubakaran, A., Mullokandov, A., Sabharwal, A., Herrick, A., Efrat, A., Erdem, A., Karakaş, A., Roberts, B. R., Loe, B. S., Zoph, B., Bojanowski, B., Özyurt, B., Hedayatnia, B., Neyshabur, B., Inden, B., Stein, B., Ekmekci, B., Lin, B. Y., Howald, B., Orinion, B., Diao, C., Dour, C., Stinson, C., Argueta, C., Ramírez, C. F., Singh, C., Rathkopf, C., Meng, C., Baral, C., Wu, C., Callison-Burch, C., Waites, C., Voigt, C., Manning, C. D., Potts, C., Ramirez, C., Rivera, C. E., Siro, C., Raffel, C., Ashcraft, C., Garbacea, C., Sileo, D., Garrette, D., Hendrycks, D., Kilman, D., Roth, D., Freeman, D., Khashabi, D., Levy, D., González, D. M., Perszyk, D., Hernandez, D., Chen, D., Ippolito, D., Gilboa, D., Dohan, D., Drakard, D., Jurgens, D., Datta, D., Ganguli, D., Emelin, D., Kleyko, D., Yuret, D., Chen, D., Tam, D., Hupkes, D., Misra, D., Buzan, D., Mollo, D. C., Yang, D., Lee, D.-H., Schrader, D., Shutova, E., Cubuk, E. D., Segal, E., Hagerman, E., Barnes, E., Donoway, E., Pavlick, E., Rodola, E., Lam, E., Chu, E., Tang, E., Erdem, E., Chang, E., Chi, E. A., Dyer, E., Jerzak, E., Kim, E., Manyasi, E. E., Zheltonozhskii, E., Xia, F., Siar, F., Martínez-Plumed, F., Happé, F., Chollet, F., Rong, F., Mishra, G., Winata, G. I., de Melo, G., Kruszewski, G., Parascandolo, G., Mariani, G., Wang, G., Jaimovitch-López, G., Betz, G., Gur-Ari, G., Galijasevic, H., Kim, H., Rashkin, H., Hajishirzi, H., Mehta, H., Bogar, H., Shevlin, H., Schütze, H., Yakura, H., Zhang, H., Wong, H. M., Ng, I., Noble, I., Jumelet, J., Geissinger, J., Kernion, J., Hilton, J., Lee, J., Fisac, J. F., Simon, J. B., Koppel, J., Zheng, J., Zou, J., Kocoń, J., Thompson, J., Wingfield, J., Kaplan, J., Radom, J., Sohl-Dickstein, J., Phang, J., Wei, J., Yosinski, J., Novikova, J., Bosscher, J., Marsh, J., Kim, J., Taal, J., Engel, J., Alabi, J., Xu, J., Song, J., Tang, J., Waweru, J., Burden, J., Miller, J., Balis, J. U., Batchelder, J., Berant, J., Frohberg, J., Rozen, J., Hernandez-Orallo, J., Boudeman, J., Guerr, J., Jones, J., Tenenbaum, J. B., Rule, J. S., Chua, J., Kanclerz, K., Livescu, K., Krauth, K., Gopalakrishnan, K., Ignatyeva, K., Markert, K., Dhole, K. D., Gimpel, K., Omondi, K., Mathewson, K., Chiafullo, K., Shkaruta, K., Shridhar, K., McDonell, K., Richardson, K., Reynolds, L., Gao, L., Zhang, L., Dugan, L., Qin, L., Contreras-Ochando, L., Morency, L.-P., Moschella, L., Lam, L., Noble, L., Schmidt, L., He, L., Colón, L. O., Metz, L., Şenel, L. K., Bosma, M., Sap, M., ter Hoeve, M., Farooqi, M., Faruqui, M., Mazeika, M., Baturan, M., Marelli, M., Maru, M., Quintana, M. J. R., Tolkiehn, M., Giulianelli, M., Lewis, M., Potthast, M., Leavitt, M. L., Hagen, M., Schubert, M., Baitemirova, M. O., Arnaud, M., McElrath, M., Yee, M. A., Cohen, M., Gu, M., Ivanitskiy, M., Starritt, M.,

Strube, M., Swędrowski, M., Bevilacqua, M., Yasunaga, M., Kale, M., Cain, M., Xu, M., Suzgun, M., Walker, M., Tiwari, M., Bansal, M., Aminnaseri, M., Geva, M., Gheini, M., T. M. V., Peng, N., Chi, N. A., Lee, N., Krakover, N. G.-A., Cameron, N., Roberts, N., Doiron, N., Martinez, N., Nangia, N., Deckers, N., Muennighoff, N., Keskar, N. S., Iyer, N. S., Constant, N., Fiedel, N., Wen, N., Zhang, O., Agha, O., Elbaghdadi, O., Levy, O., Evans, O., Casares, P. A. M., Doshi, P., Fung, P., Liang, P. P., Vicol, P., Alipoormolabashi, P., Liao, P., Liang, P., Chang, P., Eckersley, P., Htut, P. M., Hwang, P., Miłkowski, P., Patil, P., Pezeshkpour, P., Oli, P., Mei, Q., Lyu, Q., Chen, Q., Banjade, R., Rudolph, R. E., Gabriel, R., Habacker, R., Risco, R., Millièrè, R., Garg, R., Barnes, R., Saurous, R. A., Arakawa, R., Raymaekers, R., Frank, R., Sikand, R., Novak, R., Sitelew, R., LeBras, R., Liu, R., Jacobs, R., Zhang, R., Salakhutdinov, R., Chi, R., Lee, R., Stovall, R., Teehan, R., Yang, R., Singh, S., Mohammad, S. M., Anand, S., Dillavou, S., Shleifer, S., Wiseman, S., Gruetter, S., Bowman, S. R., Schoenholz, S. S., Han, S., Kwatra, S., Rous, S. A., Ghazarian, S., Ghosh, S., Casey, S., Bischoff, S., Gehrmann, S., Schuster, S., Sadeghi, S., Hamdan, S., Zhou, S., Srivastava, S., Shi, S., Singh, S., Asaadi, S., Gu, S. S., Pachchigar, S., Toshniwal, S., Upadhyay, S., Shyamolima, Debnath, Shakeri, S., Thormeyer, S., Melzi, S., Reddy, S., Makini, S. P., Lee, S.-H., Torene, S., Hatwar, S., Dehaene, S., Divic, S., Ermon, S., Biderman, S., Lin, S., Prasad, S., Piantadosi, S. T., Shieber, S. M., Mishnerghi, S., Kiritchenko, S., Mishra, S., Linzen, T., Schuster, T., Li, T., Yu, T., Ali, T., Hashimoto, T., Wu, T.-L., Desbordes, T., Rothschild, T., Phan, T., Wang, T., Nkinyili, T., Schick, T., Kornev, T., Tunduny, T., Gerstenberg, T., Chang, T., Neeraj, T., Khot, T., Shultz, T., Shaham, U., Misra, V., Demberg, V., Nyamai, V., Raunak, V., Ramasesh, V., Prabhu, V. U., Padmakumar, V., Srikumar, V., Fedus, W., Saunders, W., Zhang, W., Vossen, W., Ren, X., Tong, X., Zhao, X., Wu, X., Shen, X., Yaghoobzadeh, Y., Lakretz, Y., Song, Y., Bahri, Y., Choi, Y., Yang, Y., Hao, Y., Chen, Y., Belinkov, Y., Hou, Y., Hou, Y., Bai, Y., Seid, Z., Zhao, Z., Wang, Z., Wang, Z. J., Wang, Z., and Wu, Z. Beyond the Imitation Game: Quantifying and extrapolating the capabilities of language models. 2022. doi: 10.48550/ARXIV.2206.04615. URL <https://arxiv.org/abs/2206.04615>. Publisher: arXiv Version Number: 3.

cabularies. *PeerJ Computer Science*, 10:e1888, February 2024. ISSN 2376-5992. doi: 10.7717/peerj-cs.1888. URL <https://peerj.com/articles/cs-1888>.

Strack, R. Visual proteomics. *Nature Methods*, 20 (12):1868–1868, December 2023. ISSN 1548-7091, 1548-7105. doi: 10.1038/s41592-023-02104-6. URL <https://www.nature.com/articles/s41592-023-02104-6>.

Yang, T., Sucholutsky, I., Jen, K.-Y., and Schonlau, M. exKidneyBERT: a language model for kidney transplant pathology reports and the crucial role of extended vo-

A. Training details

Parameter	Value
Batch Size	16
Chunk Size	1024
Optimizer	AdamW (Loshchilov & Hutter, 2019)
Learning Rate	2e-5
Gradient Accumulation Steps	8
Training Epochs	5
Warm-up Steps	0.03
Weight Decay Rate	0.001
Learning Rate Scheduler	Cosine
Precision	bf16
Data Parallelism	$\times 4$
GPUs Used	4 Nvidia A100 (80GB)
Platform	Microsoft Azure
Training Time	12 hours per configuration

Table 2. Training Configuration for GPT-2